




**GIL122**  
**Eight Dish Fountain with**  
**Light**

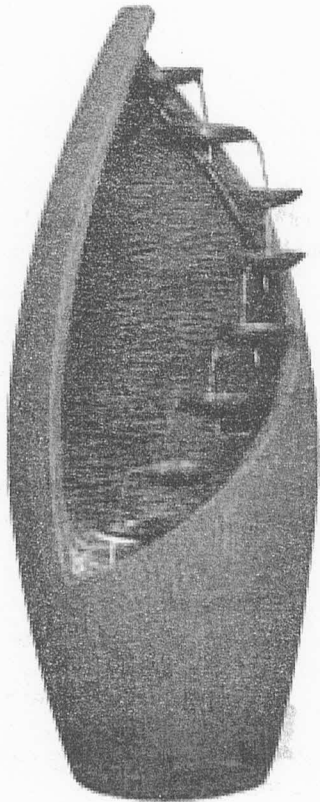


## Assembling & Using Your Product

Unpack all components carefully. Please check to ensure all parts have been removed from the packaging. Decide on a suitable location, bearing in mind there may be some splashing when the product is in use.

### Components:

- One (1) – Fountain
- One (1) – Submersible Fountain Pump
- One (1) – Transformer
- One (1) – 1 Halogen Light

### Assembling:

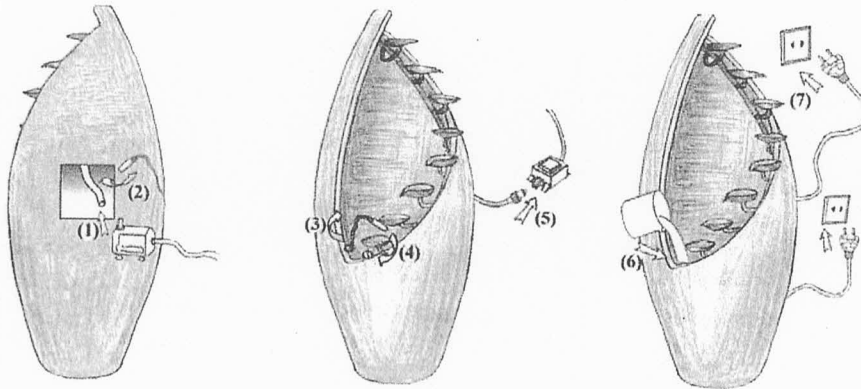

1-3

2-3

3-3

- Connect the flexible vinyl tubing to the pump fitting and set into the bottom of the fountain through the back opening shown (Diagram 1-3)
- Connect the Halogen Light and insert the light into the designated space provided. Make certain to remove the plastic black cover from the clear glass lens. Replace the back cover of the fountain, making sure the notched edge is located on the bottom right hand corner of fountain (Diagram 1-3)
- Connect the light string into the transformer. Connect all the electrical cords into your power source and/or electrical outlet, making certain no water comes in contact with the plug. Always make sure it's in a clear dry area. (Diagram 2-3)
- Gently pour water into the fountain, being careful not to overflow and cause splashing. Make sure the water completely submerges the pump and the water runs clear. Plug the transformer cord into your local power supply & make sure that there is no water around the plug & always keep the power source in a dry place. (Diagram 3-3)
  - NOTE: We recommend that you use distilled water to prevent scale build-up. The first time you operate the pump it can take up to 5 minutes for the air to be completely expelled and water begins to flow properly

