


**Sussex Wall Fountain
FT-39 Cast Stone & 94-387-XX01 Lite
(1 pieces)**

Revised July 15, 2009

COMPONENTS AND PARTS LIST

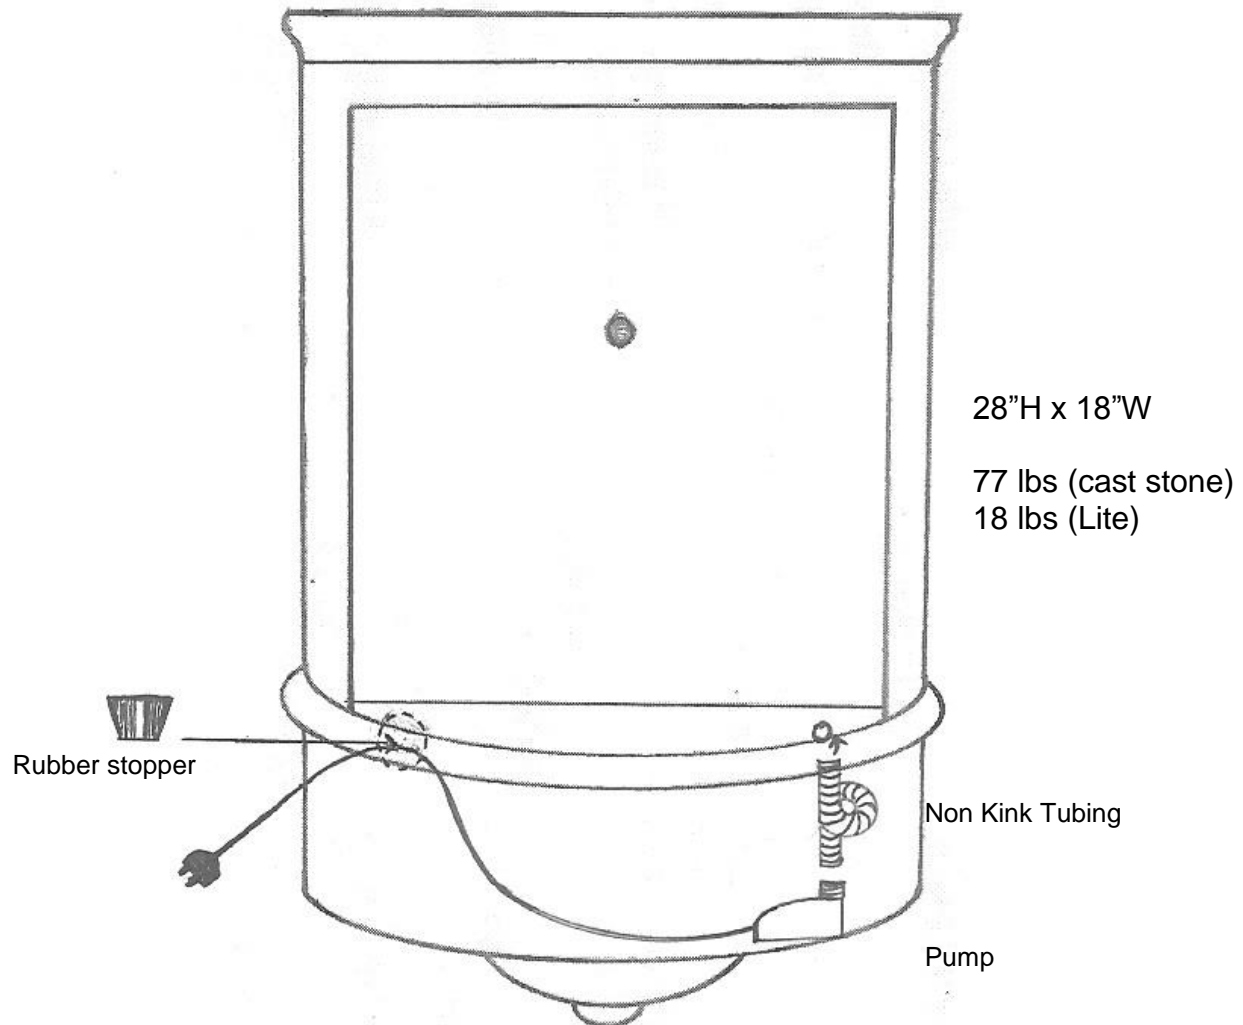

Please note: only the required pump will be included with your kit.

Pump Kit Parts List

- PK120 Pump (1) Cast Stone Fountain
- PK80 pump (1) Lite Fountain
- Approx 6" length of 1/2" black non-kink tubing (1)
- Rubber stopper # 7 (1)
- Hose clamps (3)
- Plumbers putty (1)
- Note – Hose clamps may be used as flow restrictor

CAST STONE:

position of back hooks:

There are 4 hooks positioned on the back. The two at the top are shaped like an upside down letter U, and at 5" from top and 3.75" from sides.

The two at the bottom are placed like the letter U but angled toward the corners. They are positioned a little differently, the one on the side by the hole(which is on right side of rear view) is positioned at 3.75" from side and 3.25" from bottom, and the other side is positioned 3.25" from side and 3.25" from bottom. Measured from center of U curve. Please note these are best approximation as they are placed in mold by hand as consistently as possible.

Sussex Wall Fountain
FT-39 Cast Stone & 94-387-XX01 Lite
(1 pieces)

Revised July 15, 2009

ASSEMBLY INSTRUCTIONS

1. Make sure you are assembling your fountain on a wall and using a hanging method that will sufficiently hold more than enough weight for the component, pump and water. (Approx. 85 pounds for cast stone and 25 pounds for lite).
2. Feed the pump cord through the hole in the basin leaving enough cord length inside basin to work with the pump.
3. Wrap a piece of putty around the cord where you will be placing the stopper.
4. Fit cord into stopper
5. Place a piece of putty inside the length of the slit in the stopper
6. Wrap putty around outside of stopper ensuring that the slit and the cord hole are covered and sealed
7. Press stopper firmly into the hole of basin
8. Place a hose clamp over one end of the 1/2" non kink tubing
9. Insert that end of the 1/2" non kink tubing onto the pump water outlet and tighten the clamp.
 - a. Note – one of the hose clamps may be placed on the tubing prior to installation as a flow restrictor if necessary
10. Place a hose clamp on the other end of the 1/2" non kink tubing.
11. Place that end of the tubing over the copper pipe protruding from the water feature.



12. Fill basin with water.
 - a. Note – do not allow pump to run dry as it will cause damage to the pump.

Sussex Wall Fountain
FT-39 Cast Stone & 94-387-XX01 Lite
(1 pieces)

Revised July 15, 2009

WINTER CARE AND GENERAL FOUNTAIN INSTRUCTIONS

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.